HOT DEAL

PREMIUM-WERKZEUGE
KS TOOLS
PREMIUM TOOLS

24 V

max. 75t

29 pcs

460.3620

KING PIN PRESS 75t
incl. sleeve set

- For easy disassembling and mounting of King Pins
- Perfect for conical and cylindrical pins
- Usage directly on the vehicle
- Press unit 360° turn able
- Stepless setting of height of the cylinder
- Including pneumatic hydraulic pump, cylinder, sleeves for general purpose
- Easy and safe to use
- Compact Design
- Time and money saver

Technical data:

Capacity:	75 t
Stroke:	160,0 mm
Bolt distance:	260 mm
Operating Pressure:	700 bar
Oil reservoir:	1,8 l

3.999,90 €
excl. VAT

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores.
Print mistakes, errors and technical alterations excepted. Prices valid from 01.04.2018 – 30.09.2018.

826.1007

RACINGline+

RACINGline+ BLACK/RED tool cabinet with 7 drawers

- Stainless steel worktop
- ABS Top trays left and right
- Very stable steel construction with 0,9 mm sheet steel - distortion resistant
- High level of stability
- Side walls with metal peg board for mounting different accessories
- Handle locking system prevents unintentional opening
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- With polyurethan corner protection
- Drawers are 90% extendable
- Full width metal handle
- Two fixed wheels Ø 125 mm
- Two castor wheels Ø 125 mm with rolling and turning brake
- Side mounted handle
- Electrostatic powder coating

	75 mm	150 mm
7	5	2

Technical data:

Total capacity:	B 678 x H 945 x T 459 mm
Drawer internal dimensions:	565 x 395 mm
Total load capacity:	350,0 kg
Load capacity of each drawer:	30,0 kg

449,90 € excl. VAT

713.0215

Set of universal system inserts for 3 drawers with 215 premium tools

259,90 € excl. VAT

SAFETY CONTROL SYSTEM

215 pcs

1

713.0013

2

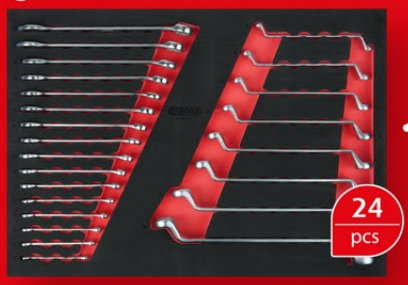

711.0027

3

1/4" 3/8" 1/2" 711.0179

827.1007

RACINGline+

RACINGline+ XL BLACK/RED tool cabinet with 7 drawers and 1 door

- Stainless steel worktop
- ABS Top trays left and right
- Very stable steel construction with 0,9 mm sheet steel - distortion resistant
- High level of stability
- Side walls with metal peg board for mounting different accessories
- Handle locking system prevents unintentional opening
- Central locking system on all drawers through the cylinder lock
- Ball bearing drawer runners
- With polyurethan corner protection
- Drawers are 90% extendable
- Full width metal handle
- Two fixed wheels Ø 125 mm
- Two castor wheels Ø 125 mm with rolling and turning brake
- Side mounted handle
- Electrostatic powder coating

	75 mm	150 mm
7	5	2

Technical data:

Total capacity:	B 1150 X H 910 X T 459 mm
Drawer internal dimensions:	565 x 395 mm
Door dimensions:	H 711 x B 433,5 mm
Total load capacity:	450,0 kg
Load capacity of each drawer:	30,0 kg

699,90 € excl. VAT

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores.
Print mistakes, errors and technical alterations excepted. Prices valid from 01.04.2018 – 30.09.2018.

HOT DEAL

PREMIUM-WERKZEUGE KSTOOLS PREMIUM TOOLS

24 V

503.4266

GEAR*plus*® combination ratcheting spanner set

- FlankTraction profile (12 point)
- In accordance to DIN 3113 / ISO 3318
- Jaw 15° offset
- Straight form
- Exact gearing with 72 teeth
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- For bits to DIN 3126 / C 6,3
- Mirror polished
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

16 pcs

8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 mm

1/4" 1/4" 3/8" 1/2"

99,90 € excl. VAT

914.1215

Mini hand reversible ratchet set

- According to DIN 3122 / ISO 3315
- Square drive adaptor to DIN 3120 / ISO 1174 with ball lock
- Reversible
- Easy and handy to use
- Extremely slim head
- Fine gearing 72 teeth ratchet mechanism
- Ergonomic 2 component handle
- Chrome vanadium

1/4" 3/8" 1/2"

3 pcs

19,90 € excl. VAT

SlimPOWER reversible ratchet

- In accordance with DIN 3122 / ISO 3315
- Square drive adaptor compliant with DIN 3120 - ISO 1174 with a ball locking device
- Switchable
- Very robust as a result of double pin technology
- Extremely slim head
- Finely-toothed 72-tooth ratchet mechanism
- With a push button quick release function on the ratchet head
- Ergonomic 2-component handle with a soft zone
- Chrome plated and mirror polished
- Chrome vanadium



		A mm	D mm	L mm	excl. VAT
920.1490	1/4"	20,0	20,0	140,0	€ 14,90
920.3890	3/8"	14,0	26,0	190,0	€ 19,90
920.1290	1/2"	34,0	32,0	245,0	€ 24,90

917.0795

Socket set

- 6 point
- FlankTraction profile
- Matt finish
- Chrome vanadium
- In durable plastic storage case

1/4" 3/8" 1/2"

4 - 4,5 - 5 - 5,5 - 6 - 7 - 8 - 9 - 10 - 11 - 12 - 13 - 14 - 15 - 16 - 17 - 18 - 19 - 20 - 21 - 22 - 24 - 27 - 30 - 32 mm

195 pcs

99,90 € excl. VAT

911.0650

Tool kit

- 6 point
- FlankTraction profile
- Matt finish
- Chrome vanadium
- In durable plastic storage case

1/2"

10 - 11 - 12 - 16 - 14 - 15 - 17 - 19 - 22 mm

50 pcs

99,90 € excl. VAT

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores.
Print mistakes, errors and technical alterations excepted. Prices valid from 01.04.2018 – 30.09.2018.

150.7015

Special TX Screw Extractor Set

- ideal for loosening and opening screws and bolts whose head is damaged or worn off
- special, left-handed thread with conical tapered cutting edges
- TORSIONpower bits for TX screws included
- bits with torsion zone for cushioning of the torque peak
- includes magnetic quick release bit holder and 1/2" socket adapter
- colour-coded bits
- For manual operation
- longer service life
- Nickel plated
- Special steel
- in durable plastic storage case

1/4" 10 mm

18 pcs

19,90 excl. VAT €

Water pump pliers

- With accurate industrial adjustment
- With safety clamping protection
- Optimum power transfer
- Asymmetric grip profile with offset teeth
- Ground heads
- With PVC dipped handle
- Chrome vanadium

Water pump pliers

- With accurate industrial adjustment
- With safety clamping protection
- Optimum power transfer
- Asymmetric grip profile with offset teeth
- Ground heads
- With PVC dipped handle
- Chrome vanadium





	A mm	B mm	L1 mm	L2 mm	kg	excl. VAT
115.2011	35,0	38,0	175,0	20,0	160	€ 9,90
115.2010	45,0	47,0	240,0	25,0	360	€ 11,90
115.2012	55,0	53,0	300,0	30,0	560	€ 14,90

	A mm	B mm	L1 mm	L2 mm	kg	excl. VAT
115.2016	90,0	80,0	415,0	30,0	1,13	€ 19,90

550.7510

WiFi videoscope set

- Easy to connect with your smartphone using WiFi
- Minimum requirements for Android-Smartphone (Android System 4.4 and higher) and iPhone IOS-System (IOS 8.0 and higher)
- 5,5 mm HD Camera
- Cable-free and easy to set up
- Photos and videos are saved directly to your smartphone
- 6 adjustable mini LED lamps
- Mobile and network independent system
- Optimal handling through network or independent working
- Probes substantially stronger and less breakage, there no glass fiber cable
- Working temperature between -15°C +50°C
- Picture reception in JPEG format
- Video records in MPEG4-format
- Very good picture and video quality
- Versitile usage
- Transmitter with inbuilt battery, load control LED and light.
- Up to 60 minutes using time without recharging
- Charging of transmitter via USB
- Included USB Adaptor to connect the camera with Laptop/PC

HD | USB 2.0 | IP 67

8 pcs

In the set included:

- WIFI Transmitter
- Camera
- Telescopic handle
- extension cord 1m
- USB adaptor
- Hook
- Magnet
- Mirror
- Software for PC
- User manual

99,90 excl. VAT €

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores.
Print mistakes, errors and technical alterations excepted. Prices valid from 01.04.2018 – 30.09.2018.

515.3070

3/8"

Pneumatic needle scaler

- In handy pistol design
- Air exhaust through the handle
- For removing and/or derusting of coatings and solid metal parts
- Is coarser than a sand balsting and finer than rust hammers
- Equipped with 19 needles of 3 mm a piece
- With adjustable needle cover
- Cold insulated handle
- Includes 1/4" coupling connector
- Robust steel housing

Technical data:

Needle amount:	19 pcs à 3 mm
Number of blows:	3200 blows/min
Vibration acceleration:	< 8,70 m/s²
Noise performance level:	110 dbA
Noise pressure level:	97 dbA
Air consumption:	170 l/min
Operating pressure:	max. 6,3 bar (90 psi)
min. Tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

179,90 € excl. VAT

515.3101

Pneumatic riveting tool pistol

- Air exhaust through the handle rear end
- For one handed operation with ergonomic design
- For professional riveting, continuous operation
- For steel, aluminium, stainless steel or copper riveting up to 6,4 mm
- With 6 mouth pieces, 4,8 mm is pre assembled
- Especially low noise level
- Swivel joint at the connection thread for flexible use
- Cold insulated
- Includes 1/4" coupling connector
- Robust aluminium housing

Technical data:

Rivet sizes:	2,4 - 3,2 - 4 - 4,8 - 5,6 - 6,4 mm
Stroke length:	19 mm
Driving power:	13839,5 N
Vibration acceleration:	< 0,60 m/s²
Noise performance level:	85 dbA
Noise pressure level:	73,3 dbA
Air consumption:	1,8 l/Hub
Operating pressure:	max. 6,3 bar (90 psi)
min. Tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

249,90 € excl. VAT

superMONSTER High Performance Pneumatic impact wrench 3.405 Nm

- With non-slip soft-grip handle
- Air exhaust downwards through the handle
- Long anvil
- With four-stage torque adjustment for tightening and loosening
- Easy to operate
- Low vibration
- Air exhaust integrated in the handle
- Low sound level
- High-performance double hammer mechanism
- Including bore hole for locking pin
- Long service life
- Cold insulated handle
- Includes 1/2" coupling connector
- Ultra light aluminium housing

3/4" 1"

3405 Nm KING CLASS

Technical data:

Square drive:	3/4" / 1"
max. Tightening torque:	1 = 919 Nm 2 = 1523 Nm 3 = 2145 Nm
max. Loosening torque:	3405 Nm
Vibration acceleration:	< 12,88 m/s²
Measuring uncertainty vibration acceleration:	1,77 m/s²
No Load current r.p.m:	6200 U/min
Noise performance level:	104,5 dbA
Noise pressure level:	115,5 dbA
Air consumption:	283 l/min
Operating pressure:	max. 6,3 bar (90 psi)
min. Tube diameter:	3/4" - 19 mm
max. Screw size:	M 38
Connection thread:	1/2"PT

KS TOOLS		kg	excl. VAT
515.3260	3/4"	7,76	€ 799,90
515.3280	1"	7,82	€ 799,90

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores.
Print mistakes, errors and technical alterations excepted. Prices valid from 01.04.2018 – 30.09.2018.

PREMIUM-WERKZEUGE
KS TOOLS
PREMIUM TOOLS

Xtremelight

515.1155

*mini*MONSTER *Xtreme*light High Performance Pneumatic Impact Wrench 1.390 Nm with Protective Cover and noise reducing hose

1390 Nm

1/2"

~1,0 KG

- Protective cover minimises damage from daily use to impact wrenches
- with non-slip soft-grip handle
- air exhaust downwards through the handle
- with practical clockwise and anticlockwise reversing lever
- Easy to operate
- simple switch of a lever for right or left hand operation
- Three-stage torque adjustment
- high-impact industrial jumbo impact
- Long service life
- cold insulated handle
- Including 1/4" coupling connector
- ultra light composite housing

-EXTREMELY SMALL!
-EXTREMELY LIGHT!
-EXTREMLY STRONG!
-EXTREMELY COMFORTABLE!
-EXTREMELY QUIET!

mini MONSTER Xtremelight

Technical data:

Square drive:	1/2"
max. Tightening torque:	1 = 270 Nm 2 = 640 Nm 3 = 965 Nm
max. Loosening torque:	1390 Nm
No Load current r.p.m:	10000 U/min
Vibration acceleration:	< 9,18 m/s²
Noise performance level:	113 dbA
Noise pressure level:	102 dbA
Reccomended torque:	615 Nm
Air consumption:	135 l/min
Operating pressure:	max. 6,3 bar
max. Screw size:	M 16
min. Tube diameter:	3/8" - 10 mm
Connection thread:	1/4"PT

3 pcs

incl. Protective Cover & Hose

179,90 € excl. VAT

EXTREMELY STRONG!

EXTREMELY SMALL!

FOR RIGHT AND LEFT HANDED USE

ONE HANDED OPERATION

WITH PROTECTIVE COVER

515.1195

BOXXER High Performance
Pneumatic impact wrench 1.290 Nm

- With non slip soft grip handle
- Air exhaust through the handle
- With practical clockwise and anticlockwise switch
- Easy operation
- 3 stage torque adjustment
- High performance double hammer mechanism
- Long service life
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light Aluminium housing

1/2"

1290 Nm

KING CLASS

Technical data:

Square drive:	1/2"
max. Tightening torque:	1 = 408 Nm 2 = 544 Nm 3 = 745 Nm
max. Loosening torque:	1290 Nm
Vibration acceleration:	< 13,56 m/s²
Measuring uncertainty vibration acceleration:	1,83 m/s²
No Load current r.p.m:	7930 U/min
Noise performance level:	104 dbA
Noise pressure level:	88 dbA
Air consumption:	128 l/min
Operating pressure:	max. 6,3 bar (90 psi)
min. Tube diameter:	1/2" - 12,7 mm
max. Screw size:	M 16
Connection thread:	1/4"PT

MONSTER High Performance
Pneumatic impact wrench 1.690 Nm

- With non slip soft grip handle
- Air exhaust through the handle
- With practical clockwise and anticlockwise switch
- Easy operation
- 3 stage torque adjustment
- High performance double hammer mechanism
- Long service life
- Cold insulated handle
- Includes 1/4" coupling connector
- Ultra light Aluminium housing

1/2" 3/4"

1690 Nm

KING CLASS

Technical data:

Square drive:	1/2"	3/4"
max. Tightening torque:	1 = 510 Nm 2 = 680 Nm 3 = 931 Nm	1 = 510 Nm 2 = 680 Nm 3 = 931 Nm
max. Loosening torque:	1690 Nm	1690 Nm
No Load current r.p.m:	7930 U/min	7930 U/min
Vibration acceleration:	< 17,9 m/s²	< 13,56 m/s²
Noise performance level:	98 dbA	104 dbA
Noise pressure level:	87 dbA	88 dbA
Reccomended torque:	542 Nm	542 Nm
Air consumption:	178 l/min	178 l/min
Operating pressure:	max. 6,3 bar	max. 6,3 bar
max. Screw size:	M 16	M 16
min. Tube diameter:	1/2" - 12,7 mm	1/2" - 12,7 mm
Connection thread:	1/4"PT	1/4"PT

KS TOOLS PREMIUM TOOLS		kg	excl. VAT
515.1210	1/2"	2,15	€ 139,90
515.3785	3/4"	2,20	€ 249,90

980.1108

Quick-Lock coupling for grease guns

- Ideal for commercially available manual, battery operated and pneumatic grease guns
- Secure greasing during maintenance work without holding in place
- Uncoupling possible with pressures up to 690 bar
- No spraying when uncoupling
- Simple and secure loosening, even under high pressure through lever actuation
- For all commercially available DIN and SAE Grease nipples
- With check valve
- Inbuilt sealing for long term usage
- Coupling with 4 claws

29,90 excl. VAT €

118.0013

Universal shear

- Robust short shears
- With screw on blade
- Various applications
- Stainless steel blade
- With two component handle

4,90 excl. VAT €

150.8267

Pressure pump foam sprayer (foamer)

- Made from high-quality polyethylene
- Including 3 nozzles for different foam densities
- Ideal for cleaning and disinfecting
- For various chemicals such as detergents, releasing and cleaning fluids
- With safety lever
- Viton® sealing
- Capacity: 1,8l







19,90 excl. VAT €

Pressure pump vaporiser

- Made from high-quality polyethylene
- For various chemicals such as brake cleaner, detergents, releasing and cleaning fluids etc.
- Adjustable and closable brass spray head
- Viton® seal
- Suitable for overhead work

		excl. VAT
150.8251	1 L	€ 8,90
150.8252	2 L	€ 9,90

800.0960

Aluminium work platform

- Skid proof profile on the platform stage
- Chequer plate profile on the steps
- Double sided usage
- Large platform for safe standing
- Safety clips for added security
- Beams and step made from aluminium
- Easy to store as the unit is fully collapsible
- The gripped plastic feet protect the surface and add stability
- Substaitial aluminium construction

74,90 excl. VAT €

Technical data:

Platform dimensions:	1000 x 300 mm
Total load capacity:	150 kg

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores.
Print mistakes, errors and technical alterations excepted. Prices valid from 01.04.2018 – 30.09.2018.

HOT DEAL

24 V

PREMIUM-WERKZEUGE
KS TOOLS
PREMIUM TOOLS

150.4410

PERFECT LIGHT

perfectLight Headlamp with Motion Sensor 120 Lumen

- Ideal for off-grid working
- extremely powerful light CREE XP-G2 front LED
- Splash water protected according to IP54
- long service life
- fast and secure hold due to adjustable headband
- flexible positioning
- motion sensor for switching on and off
- two brightness levels
- up to 40 m light range
- 3 AAA 1.5V batteries included
- Shock-proof

Technical data:

Capacity:	14 hours / 7 hours lamp duration
Light source:	CREE XP-G2 LED
Luminosity:	60 lumen / 120 lumen
Weatherproof protection:	IP54
Working temperature:	-10°C bis +40°C

19,90 € excl. VAT

150.4425

PERFECT LIGHT

perfectLight 12+24V-LED Inspection Lamp 130 Lumen

- Ideal for off-grid working
- powerful LED
- Splash water protected according to IP30
- focusable light beam
- up to 100 m light range
- with removable plastic protection handle
- easily and quickly rechargeable over the 12+24V cigarette lighter socket
- 2 hours charging time
- 1 hour burn time

Technical data:

Capacity:	Lamp duration 1 hours
Light source:	High power LED
Luminosity:	130 lumen
rechargeable battery:	3,7 V / 550 mAh
battery material:	Lithium-Ion
Weatherproof protection:	IP30
Working temperature:	-10°C bis +40°C

24,90 € excl. VAT

150.4440

PERFECT LIGHT

perfectLight Workshop Hand Lamp 400 Lumen

- Ideal for off-grid working
- powerful spot LED
- extremely powerful light COB front LED
- Splash water protected according to IP65
- Housing body covered with high quality rubber
- Shock-proof
- Revolving hooks for suspending
- foldaway magnetic stand
- includes automatic turn off charging station
- two brightness levels
- 5 hours charging time
- 6 hours / 3 hours lamp duration

69,90 € excl. VAT

Technical data:

Capacity:	6 hours / 3 hours Lamp duration
Light source:	COB LED
Luminosity:	200 lumen / 400 lumen
rechargeable battery:	3,7 V / 3000 mAh
battery material:	Lithium-Ion
Weatherproof protection:	IP65
Working temperature:	-10°C bis +40°C

150.4435

PERFECT LIGHT

perfectLight 5 + 1 Inspection Lamp 100 Lumen

- Ideal for off-grid working
- powerful spot LED
- extremely powerful light COB front LED
- Splash water protected according to IP20
- three light modes: two brightness levels and a spot
- with belt clip
- impact-resistant polycarbonate housing
- 3 AAA 1.5V batteries included

9,90 € excl. VAT

Technical data:

Capacity:	Lamp duration 3 hours
Light source:	5 + 1 LED
Luminosity:	100 lumen / 50 lumen, Spot 25 lumen
Weatherproof protection:	IP20
Working temperature:	-10°C bis +40°C

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores.
Print mistakes, errors and technical alterations excepted. Prices valid from 01.04.2018 – 30.09.2018.

865.0020

Service trolley

- Ideal for emission tester or storing diagnostic equipment
- Also suitable for customer service entrainment
- Robust and stable steel construction with 1,0 mm sheet steel distortion resistant
- High level of stability
- Lockable door
- With several openings for passing the cord
- Ball bearing drawer runners
- Drawers are extendable
- Front side with rounded edges
- Internal hinges and cylinder lock
- 2 shelves, universal adjustable in height
- Four castor wheels Ø 125 mm with rolling and turning brake
- Electrostatic powder coating

Technical data:

Drawer internal dimensions:	300 x 450 x 55 mm
Total load capacity:	150,0 kg
Load capacity of each drawer:	25,0 kg

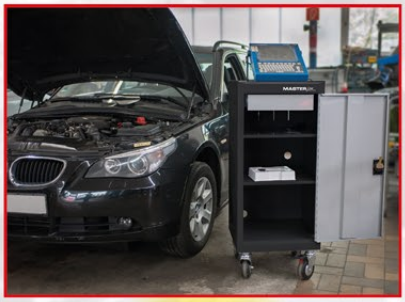

329,90 € excl. VAT

150.0950

12/24V Master diagnostic test and measurement lead set

- To use with function test lamps and multimeters on consumers and circuits
- Easy and safe signal pick-up through direct contacting
- High-quality checking and testing accessory components for different test leads, test cables and test strips for the professional mechanic
- For daily use in diagnostics and error detection
- Large set composition for versatile use, e.g. for checking poor ground connections, continuity test trials, polarity testing or for operating electrical units, such as starters, wiper motors, electrical window lifters, electrical antennas etc.
- Includes potentiometer with adjustable resistor (0 to 5 kiloohms) for testing temperature sensors or position sensors, such as in throttle valves, tank sensors, intake manifold flap actuators and air control valves of air conditioning systems
- Includes 2 ohm SRS test measuring resistor for diagnosing airbag sensors
- Includes polarity tester with duo LED for checking hall sensors, photo sensors or whether injector plus or earth are controlled. Varies depending on the direction of current flow: red for positive voltage or green for negative voltage
- Flexible silicone cable
- Extra-thin probe
- Applicable up to a maximum of 24 V (10 A)
- Bi-colour test leads for polarity indication

92 pcs

229,90 € excl. VAT

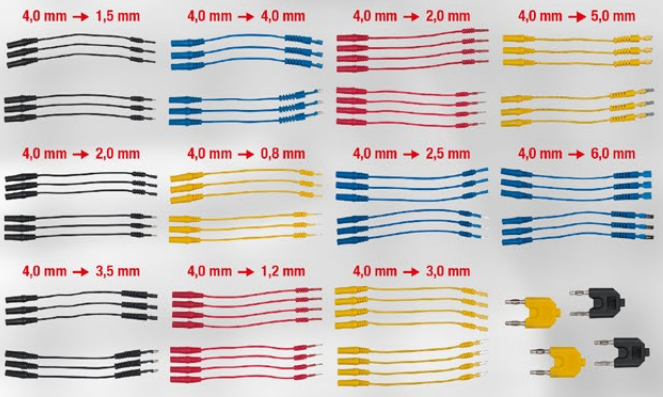

150.2040

Multimeter with inductive clamp

- Specially developed multimeter for working in the motor vehicle area
- As well standard functions also ideal for a number of revolution measurements
- Double display (digital and bar chart display)
- 2 test leads for current with test tip / crocodile clip
- 1 test lead for temperature testing
- Ignition timing ascertainment up to 8-cylinder engines possible (Dwell function)
- Digital and bar chart display
- With integrated safety fuse for the protection of the circuits
- In shock-proof rubber protection cover

Functions:

DC and AC current
DC and AC voltage
Dwell
Resistance
Frequency
Diode test
RPM
Temperature-automatic shutdown
Battery condition indicator

99,90 € excl. VAT

Technical data:

Co-current flow:	326 µA - 10 A
Alternating current:	326 µA - 10 A
DC voltage:	326 mV - 1000 V
AC voltage:	3,26 V - 750 V
Resistance measurement:	32 - 32000 Ohm
Frequency measuring:	32,60 - 200 kHz
Speed measurement:	300 - 12000 RPM
Temperature accuracy:	23° C ± 5° C
Power requirement:	9V block battery
Fuse protection S1 (fine flow):	500 mA/350V (20x5 mm)
Fuse protection S2 (power-test socket):	10A/250V (30x5 mm)
Storage temperature:	-10° to +50° C (14° to 122° F)
Working temperature:	0° to +40° C (32° to 104° F)
Temperature measurement:	-20° bis +760° C (-4° bis 1400° F)

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores.
Print mistakes, errors and technical alterations excepted. Prices valid from 01.04.2018 – 30.09.2018.

TX-E special socket for Mercedes

3/4" 1/2"

- For loosening and tightening of the special screw connection of the vehicle body
- Internal square in accordance with DIN 3121 / ISO 1174
- For machinery usage
- Phosphate finish
- Chrome molybdenum

Application range: Mercedes Bus (405), Unimog (437), Econic (956), Actros (963), Arocs (964), Atego (967), Zetros(949)

KS TOOLS			L mm	D1 mm	D2 mm	T mm	g	excl. VAT
460.0014	3/4"	E30	111,0	38,0	38,0	31,0	762	€ 19,90
460.0016	1/2"	E30	46,0	34,0	30,0	30,0	231	€ 12,90

115.1055

KS TOOLS PREMIUM TOOLS

7 pcs

Automotive hose clamp pliers set

- PVC dipped handle
- For opening and closing of cobra hose clamps
- Swivel pressed jaws
- Includes locking mechanism and ratchet function
- Self opening mechanism
- For the dismantling and assembly of hose clamps
- Includes bowden cable
- Chrome molybdenum

139,90 € excl. VAT

450.0090

KS TOOLS PREMIUM TOOLS

4 pcs

Punch set for trucks

- Conical tapered point
- Universal use
- For extracting cotter pins, bolts, bearing rings etc.
- Ideally suited for daily workshop use
- High quality and substaintial construction
- Premium tempered and hardened steel
- Special steel

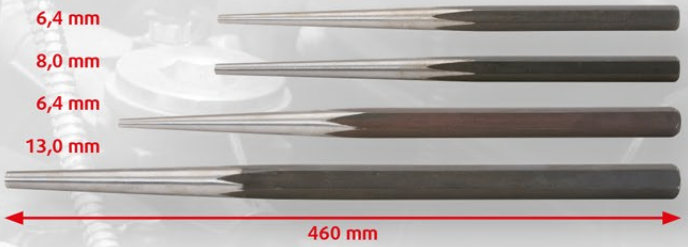

79,90 € excl. VAT

460.1815

KS TOOLS PREMIUM TOOLS

Cylinder liner extractor set

- Ideal for removing of cylinder liner in commercial vehicles and industrial bearing
- Outriggers suitable especially for large cylinder liners and bearings
- Suitable for cylinder liner with Ø 60 – 160 mm
- Solid state
- 3 spreader guarantee an optimal adjustment of the internal extractor
- Extremely robust spindle with inductively hardened thread
- Requires light expenditure of energy
- Enormous time and cost saving
- Special steel
- In durable plastic storage case

Application range: Cylinder liner on MAN, Mercedes etc.

Consists of:
2 x Double ended support
1 x Traverse
1 x Internal extractor Ø 60 - 160 mm
1 x Spindle with nut, 7/16"x14G
1 x Toggle

Mercedes MAN

6 pcs

429,90 € excl. VAT

460.1095

DAF piston ring – installation aid

- For the pre-tensioning of the piston rings when inserting the piston in the cylinder
- Conical mounting flange
- Enormous time and cost saving
- Special steel

49,90 excl. VAT €

460.1090

Volvo injector extractor with 0.9 kg impact weight

- Robust design
- For the extraction of the firmly burned injectors in thecylinder head
- Enables short and intensive impact through impact weight
- Cylinder head does not work against the thrust bearing
- Avoids tilting of the injectors
- Short design for hard-to-reach areas
- Includes impact weight, claw and clamping yoke
- Thread on impact extractor 5/16" x 16 mm
- Special steel

Application range:
Volvo FM12, FM440, FH500 etc.

119,90 excl. VAT €

460.1805

Volvo injector sleeve puller set

5 pcs

Volvo FM12

- Ideal for the assembly and disassembly of injector sleeves
- Robust design
- Cylinder head works against the thrust bearing
- Tilting of the injector sleeve is to be avoided
- Short design for difficult to access working areas
- Special steel

Application range:
Volvo FM12

129,90 excl. VAT €

460.1005

Volvo valve spring compressor

Volvo FM12

6 pcs

- For assembly and disassembly of valve springs and valves
- For fitted or removed cylinder head
- Enormous cost and time saving
- Removal of cylinder head not necessary for repair of valve shaft seals or valve springs
- Fixing via pump injector guide with M10x1,5 screws
- Special steel

Application range:
Cylinder heads from Volvo FM12

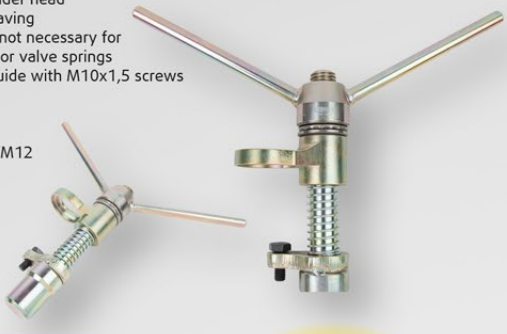



169,90 excl. VAT €

460.0975

Volvo injector sleeve set

Volvo FM12

3 pcs

- Ideal for the assembly and disassembly of injector sleeves
- Robust design
- Cylinder head works against the thrust bearing
- Tilting of the injector sleeve is to be avoided
- Short design for difficult to access working areas
- Special steel

Application range: Volvo FM12

199,90 excl. VAT €

460.0635

Universal pulley wheel puller set with hydraulic cylinder

4 pcs

Hino, Scania, Mercedes, Volvo

- Ideally suited for the professional disassembly of crank shaft pulley wheels
- Hydraulic cylinder removes the crank shaft pulley wheels without difficulty
- Extremely sturdy execution
- Variable disassembly flange
- Suitable for 4 and 5 hole pulley wheels
- Suitable for HGVs
- Special steel

Application range:
Hino, Scania, Mercedes, Volvo etc.

249,90 excl. VAT €

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores.
Print mistakes, errors and technical alterations excepted. Prices valid from 01.04.2018 – 30.09.2018.

150.2450

Universal commercial vehicle clutch aligner tool set

- Universal usage for vehicles with a hub diameter of Ø 36.0 - 52.0 mm
- Includes 4 centring sleeves
- Robust design
- For the correct and swift assembly of one and two-disk dry clutches
- For precise centring of clutch disks via the guide bearings in the crankshaft
- For transporters and small commercial vehicles
- With reinforced knurled metal clamping screws

Application: Commercial vehicles, agricultural vehicles, construction vehicles, town and forest vehicles, etc.

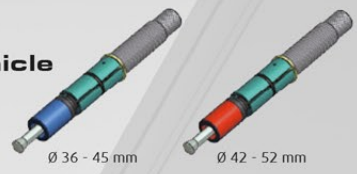



6 pcs

179,90 € excl. VAT

460.1705

Truck spring pin metal bush removal set

- Suitable for the installation and removal of the bearing bushes in commercial vehicle spring suspension
- The slotted bushes can be effortlessly preloaded using the clamping block and the accompanying half shells and thus adjusted to the installation dimensions
- Includes 12 t hydraulic cylinder, especially in the construction of fixed bushes
- The hydraulic cylinder is made for universal usage
- Supplied without hydraulic pump
- Optional: Hand pump 640.0010
- Optional: Air Hydraulic Pump 640.0020
- Optional: Electric Hydraulic Pump 640.0030
- Special installation method that protects the bush via parallel working tensioning elements
- The function of the bearing bush is retained
- Simple handling and quick assembly times
- Safe working
- Suitable for bush change directly on the vehicle

Application:
Ø 51 mm - Volvo FM12
Ø 60 mm - DB / Renault (430/450/460)
Ø 68 mm - MAN-TGA (140/414/460)
front axle spring ROR, SAF

Ø 51 mm VOLVO(FM12)

Ø 68 mm MAN-TGA (410/414/460)

Ø 60 mm RENAULT (430/450/460)

Original CEJN

1.199,90 € excl. VAT

640.0010

Hydraulic hand pump

- Single stage
- Reverse valve for advance and return stroke
- Safety valve for overload protection
- Includes pressure tube 1.8 meters
- Operating pressure max. 700 bar

749,90 € excl. VAT

640.0020

Pneumatic hydraulic pump

- Pneumatic working
- For simply agent press cylinders
- Safety valve for overload protection
- Includes pressure tube 1.8 meters
- Usable tank volume 2081cm³ = 2.081l
- Operating pressure max. 700 bar
- Output per stroke:
0,8 l/min up to 200 bar
0,1 l/min up to 700 bar

1.299,90 € excl. VAT

Slogging TX-E spanner with 2 striking faces

3/4"

- TX-E-Profile
- Ideal for loosening and tightening TORX® screws on brake calliper screw connections
- Avoid disassembly of the steering tie lever
- With 3/4" square drive for the correct tightening of the screw
- With lasered troque formula for calculating the correct effective length
- With 2 impact area
- Phosphate finish
- Chrome vanadium

Application range: Front axle and trailing axles for MAN TGL, TGM, TGS, TGA und TGX

	mm	A mm	B mm	L mm	g	excl. VAT
517.0908	E18	10,0	30,0	215,0	540	€ 39,90
517.0910	E20	12,0	32,0	220,0	550	€ 39,90
517.0914	E24	12,0	38,0	220,0	550	€ 39,90

450.0360

MAN

3 pcs

MAN brake calliper socket set

- Special socket
- For the dismantling and assembly of brake line fittings
- Extra large drive for extremely tight fitting couplings
- Extremely robust
- Especially suitable for narrow hard to access areas
- Chrome vanadium

59,90 € excl. VAT

460.2615

3 pcs

SAF

Brake piston special socket wrench set for WABCO and Knorr disk brakes

- Ideal for pushing back the brake piston damage-free
- Allows for safe and comfortable working
- Whilst carrying out maintenance work and when changing the brake pads it is necessary to lead the brake pistons back into the brake calliper
- High precision guarantees an easy and durable use
- Special adaptor sockets with magnet
- High time savings
- Matt finish
- Chrome vanadium

29,90 € excl. VAT

Application range: WABCO und Knorr disk brakes on commercial vehicle axles by SAF and other manufacturers

518.1163

Wheel spanner with slip joint for commercial vehicles

- 6-point
- DIN 3319/ISO 6788
- Sturdy design
- Foldable
- With slip joint for lower lying wheel nuts or for enhancing the leverage
- Ideal for use with vans, commercial vehicles, tractors, agricultural and construction machines
- Square drive as per DIN 3120/ISO 1174 with ball stop
- Polished heads
- Matt finish
- Special steel

Wheel nut wrench for commercial vehicle

- Two sided serviceable
- Large head depth for projecting bolts
- Alternative insert for tommy bar
- Ideally suited for commercial vehicles
- Matt finish
- Special steel

	mm	L mm	g	excl. VAT
518.0970	24x27	400,0	1,70	€ 34,90
518.0971	24x38	400,0	1,90	€ 36,90
518.0972	27x30	400,0	1,80	€ 39,90
518.0973	27x32	400,0	1,88	€ 39,90
518.0974	27x33	400,0	1,88	€ 39,90
518.0975	28x33	400,0	1,80	€ 39,90
518.0976	30x32	400,0	1,88	€ 42,90
518.0977	30x33	400,0	1,90	€ 42,90
518.0978	32x33	400,0	1,80	€ 42,90
518.0979	3/4"x32	400,0	1,90	€ 39,90

518.0981

Tommy bar for commercial vehicle wheel nut wrench

- Matt finish
- Special steel

19,90 € excl. VAT

89,90 € excl. VAT

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores.
Print mistakes, errors and technical alterations excepted. Prices valid from 01.04.2018 – 30.09.2018.

460.1765

Universal commercial vehicle wheel hub extractor set

- Variable use for bolt circle diameter 110 mm - 448 mm
- Universal use for bolts up to max. Ø 30 mm
- With 2 rods and trapezoid thread spindle
- With 3 pressure pieces
- Includes 5 thread adaptor sets
- Special steel

Application range: Sauer, BPW, Scania, Fuso, Hino etc.

799,90 € excl. VAT

450.0175

MAN TGA groove nut spanner with locating tube

- Internal square drive to DIN 3121 / ISO 1174
- Six sided drive 60 mm
- High accuracy of fit
- Extremely robust version
- Optional with locating tube
- Suitable for high tightening and loosening torque
- Special steel

Application range: MAN-TGA rear axle, HY-1350 (Hypoid)

299,90 € excl. VAT

150.1430

Thread chaser for outside thread, Ø 25 - 140 mm

- For re-cutting and cleaning damaged outer threads Ø 25 - 140 mm
- Very large application range due to 6 supplied plates
- No damage to the thread due to soft support and guide jaw
- Suitable for right and left-handed thread
- Variable adjustment
- Can be used everywhere regardless of the thread length
- The chaser is well-guided due to the width of the jaw and does not tilt
- Quick conversion possible through threading die change
- Special steel

Metric: 1,0 - 1,25 - 1,5 - 1,75 - 2,0 - 2,5 - 3,0 - 3,5 mm
Imperial: 24 - 20 - 18 - 16 - 14 - 12 - 11,5 - 11 - 10 - 9 - 8 - 7,5 - 7 - 6 - 5 - 4 pitch/imperial

119,90 € excl. VAT

ERGOTORQUE® *precision* torque wrench with rotary mushroom ratchet head

1/4" 1/2" 3/4" 1"

- Actuation accuracy: >±3 % tolerance of the set scale value
- Precise reading accuracy for a minimum 5.000 tightening cycles
- For controlled fastening in clockwise and counter clockwise directions
- Torque setting by pulling out and pushing in the slide in knob at the end of the handle
- The direction of rotation (clockwise and counter clockwise) can be changed by simply rotating the square drive piece
- Double scale in Nm and lbf·ft divisions for precise adjustment
- Includes micrometer scale in Nm divisions for precise and fine adjustment
- Large vision panel, precise adjustment using a magnifying glass
- An audible and palpable signal when the desired torque value is achieved
- Exact gearing 30 teeth ratchet mechanism
- Torque setting is quick and easy using the locking knob in the handle end
- Secure locking function within the handle
- Two component handle with a soft zone, is ergonomic in design and comfortable in the hand
- Square drive adaptor to DIN 3120 - ISO 1174 with ball lock
- Individually marked with serial number unique product identification
- Includes test certificate in accordance with DIN EN ISO 6789:2003 national standard

DIN EN ISO 6789



KS TOOLS PREMIUM TOOLS	■	Nm	Nm	lbf-ft	L mm	D mm	H mm	kg	excl. VAT
516.1412	1/4"	1-25	0,10	0,8 - 18	289,0	35,0	18,0	0,46	€ 114,90
516.1432	1/2"	10-100	0,50	8 - 75	412,0	45,0	23,0	0,91	€ 119,90
516.1442	1/2"	20-200	1,00	15 - 150	500,0	45,0	23,0	1,30	€ 124,90
516.1472	1/2"	60-320	1,00	45 - 236	585,0	45,0	23,0	1,45	€ 164,90
516.1482	1/2"	80-420	1,00	60 - 310	678,0	45,0	23,0	2,10	€ 229,90
516.1490	3/4"	100-550	1,00	75 - 405	960,0	69,0	33,0	3,80	€ 599,90
516.1493	3/4"	200-750	10,00	150 - 550	1250,0	69,0	33,0	5,30	€ 699,90
516.1495	1"	200-1000	20,00	220 - 730	1500,0	90,0	36,0	5,80	€ 809,90

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores.
Print mistakes, errors and technical alterations excepted. Prices valid from 01.04.2018 – 30.09.2018.

700.1150

Hydraulic nut splitter

- Small execution
- Suitable for nuts to a tensile strength class 10
- Work pressure max. 5 t
- Especially suitable for narrow hard to access areas

69,90 € excl. VAT

Roller head telescopic pry bar

- Lever extension with push-button in steps
- Roller head adjustable in steps
- Extra narrow, with recessed push button
- Maximum power transmission in the narrowest area
- Optimal leverage in minimal work area
- Ideally suitable for passenger cars to commercial vehicles
- Special steel



	L mm	H mm	B mm	g	excl. VAT
911.8186	325-460	90,0	12,0	780	€ 39,90
911.8187	600-915	120,0	20,0	1900	€ 79,90
911.8188	865-1350	145,0	24,0	4260	€ 119,90



500.8003

Workshop creeper

- for use when lying down
- padded finish for easier handling
- washable cushion
- shallow depth for comfortable working under the vehicle
- extra stable, low noise, oil and acid resistant solid rubber castors
- black powder-coated metal frame
- maximum weight up to 180 kg

99,90 € excl. VAT

160.0739

Pneumatic hydraulic trolley jack 30 t / 15 t

- Hydraulic jack for vehicles up to max. 30 t
- Large lifting base for safe standing
- Short and compact design
- Extremely light weight ideal for the mobile usage
- Overload protection through overload pressure valve
- Maximum lift is reached using one of the two adaptors included
- Very short and transportable design
- Easy running oil and acid resistant solid rubber wheels
- Especially suitable for narrow hard to access areas
- Ideally suited for daily workshop use
- Durable steel construction

1.299,90 € excl. VAT

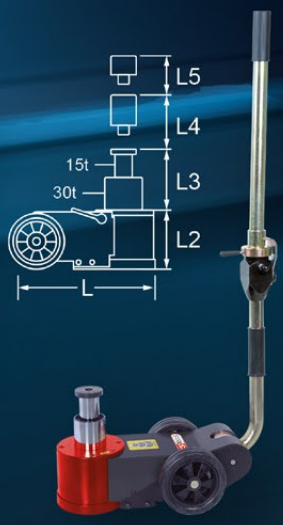

Your Partner

KS TOOLS
Werkzeuge-Maschinen GmbH
Seligenstädter Grund 10 - 12
D- 63150 Heusenstamm
Deutschland
Tel.: +49 6104 4974-0
Fax.: +49 6104 4974-11
e-mail: kstools@kstools.de
www.kstools.com

4 042146 762875
LL18-05E_EUR

All prices are ex. VAT. With the release of this leaflet all previous prices became invalid. Sold only in specialist stores.
Print mistakes, errors and technical alterations excepted. Prices valid from 01.04.2018 – 30.09.2018.